



TYPICAL RIGHT OF WAY AND ROADWAY SECTION


NOTE:
CONTRACTOR TO SEED/STABILIZE
FROM CURB TO ROW PRIOR TO
TOWN ACCEPTANCE

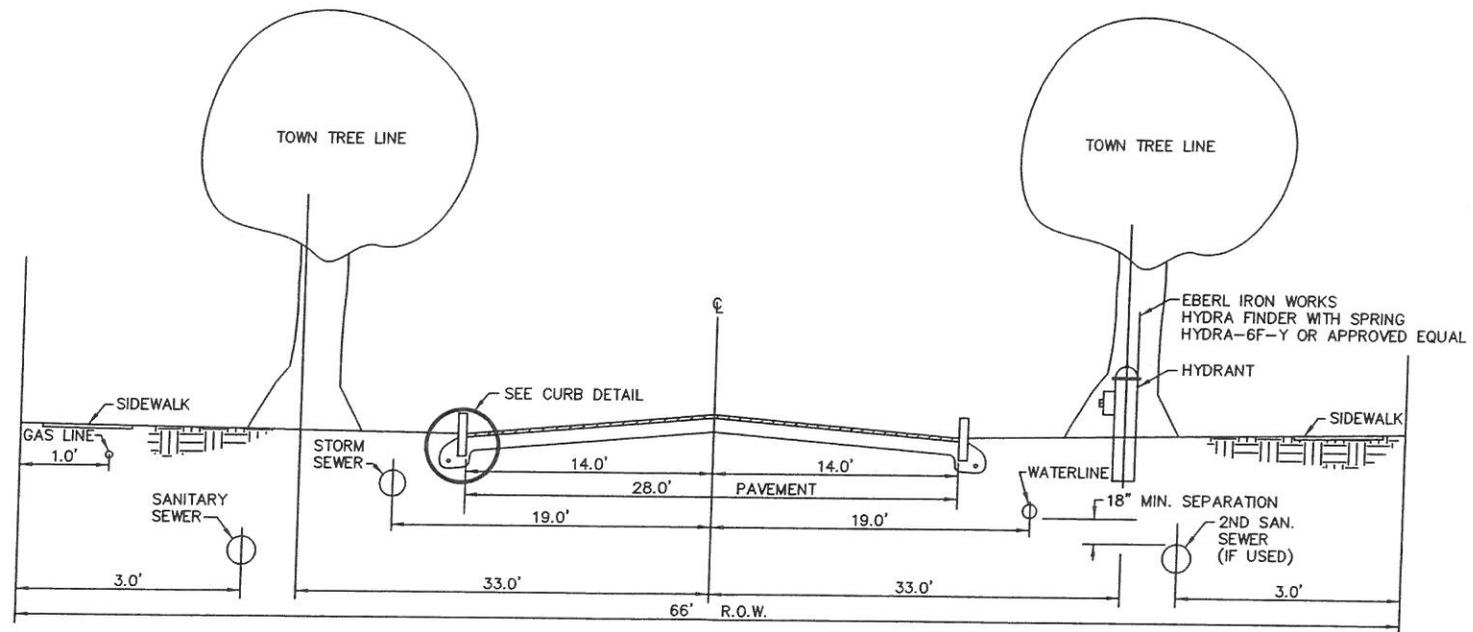


TYPICAL ROADWAY & UTILITY LOCATION

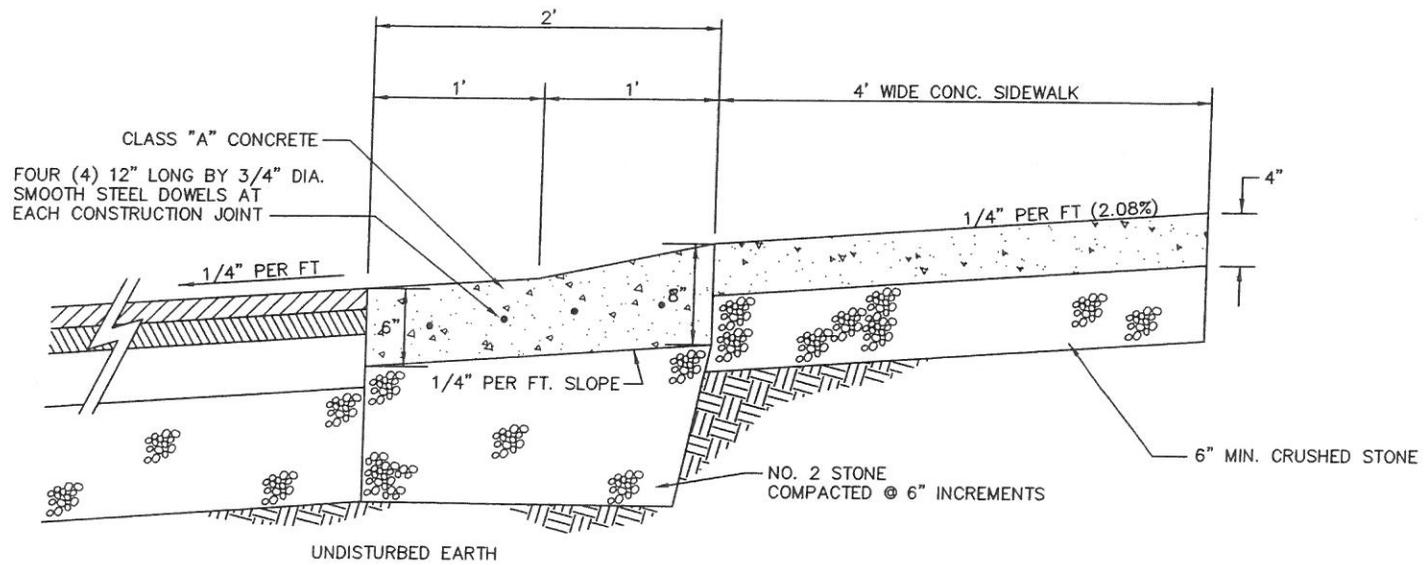


ISLAND CURBING AND SIDEWALK DETAIL

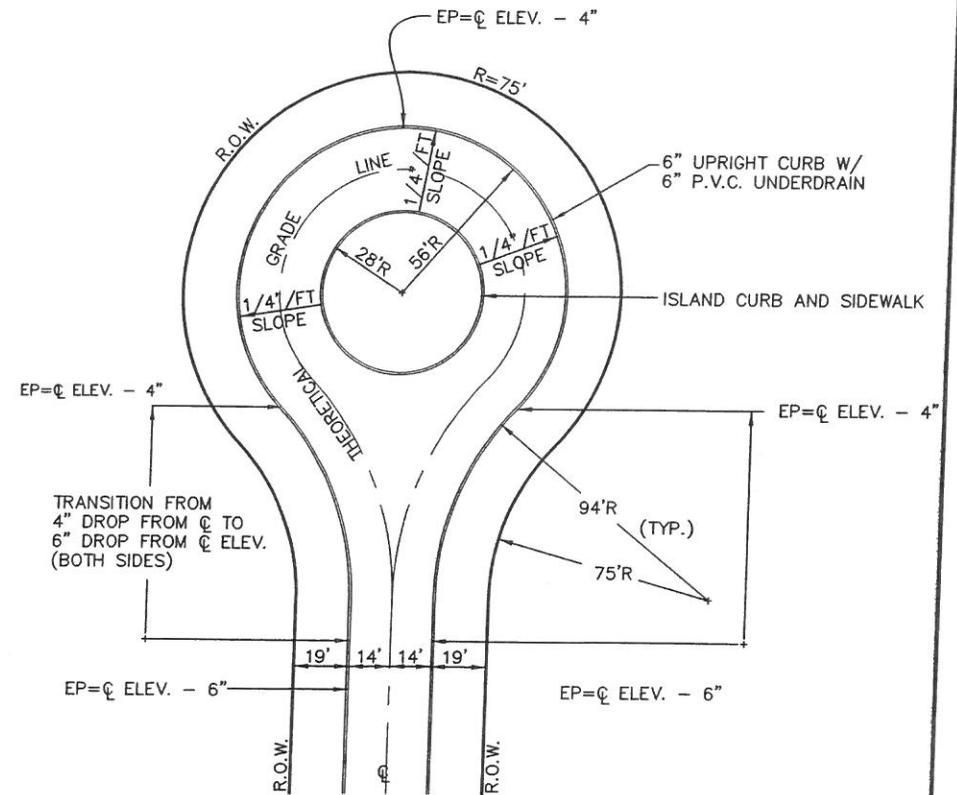


CUL-DE-SAC DETAIL

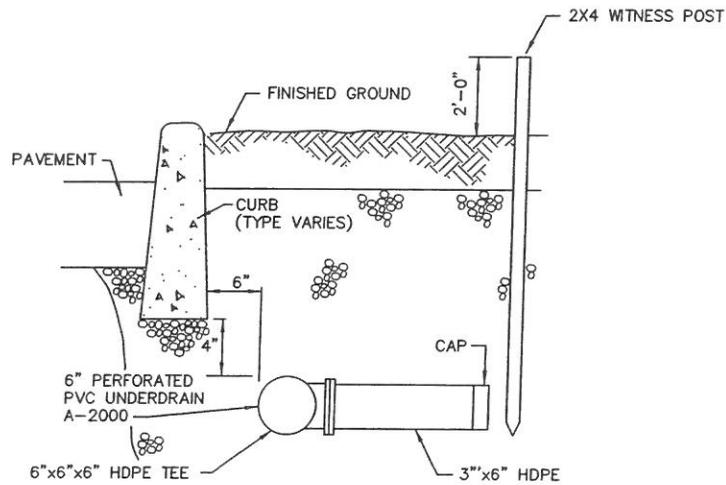


CURB BUBBLER

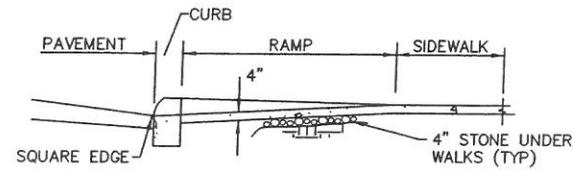


SECTION A-A

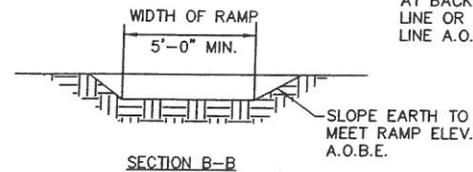


SECTION B-B

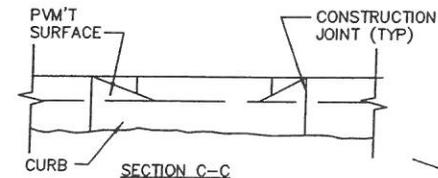

SECTION C-C

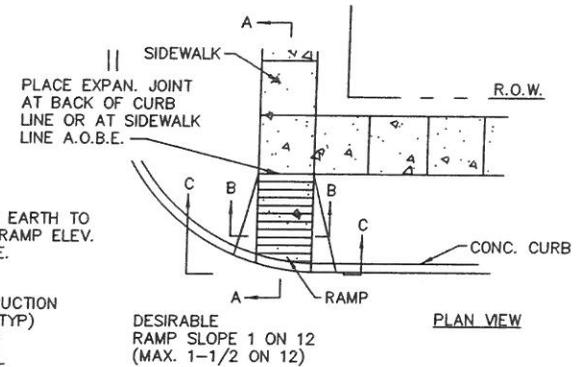


PLAN VIEW

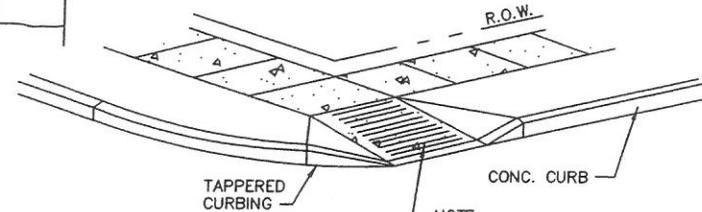

NOTE:
SURFACE TEXTURE OF RAMPS SHALL BE DEEP GROOVED. 1/2" WIDE BY 1/4" DEEP ON 1" CENTERS TRANSVERSE TO THE RAMP

TYPICAL ADA COMPLIANT SIDEWALK RAMP


STD. HEAVY DUTY FRAME & COVER
 W/STORM SEWER DESIGNATED
 (NEENAH FOUNDRY No. R-1792-FL
 OR EQUAL) USE No. R-1726 IN
 PAVED AREAS.

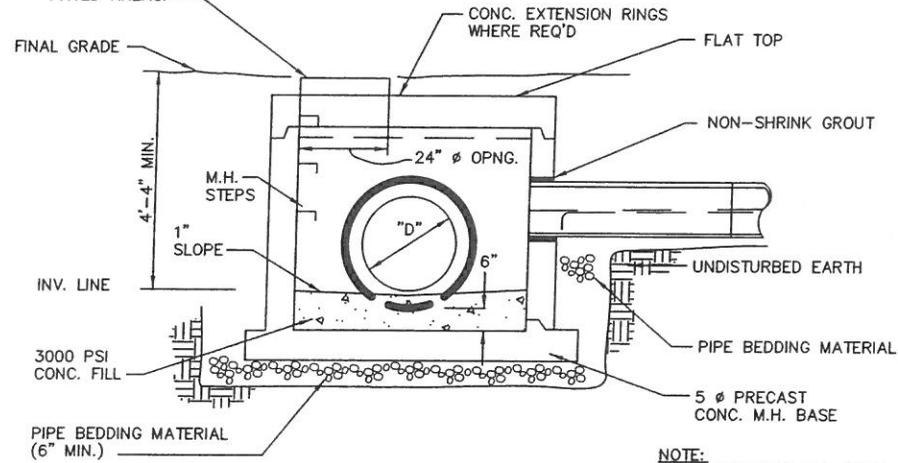


**60" MANHOLE
 FOR 24" AND 30" RCP OR HDPE**

NOTE:
 BRICK MASONRY AND SOLID CONC.
 BLOCKS IS AN ACCEPTABLE ALTERNATE
 TO PRECAST CONC. STORM M.H.'S WHERE
 THE STORM SEWER IS 8' OR LESS
 IN DEPTH.


STD. HEAVY DUTY FRAME & COVER
 W/STORM SEWER DESIGNATED
 (NEENAH FOUNDRY IN No. R-1782
 OR EQUAL) USE No R-1726 IN
 PAVED AREAS.

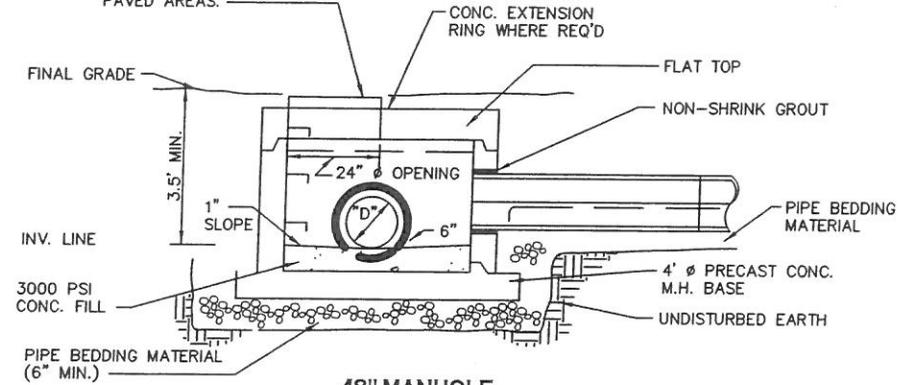


**48" MANHOLE
 FOR 12", 15" RCP OR HDPE
 STORM MANHOLE SECTION**

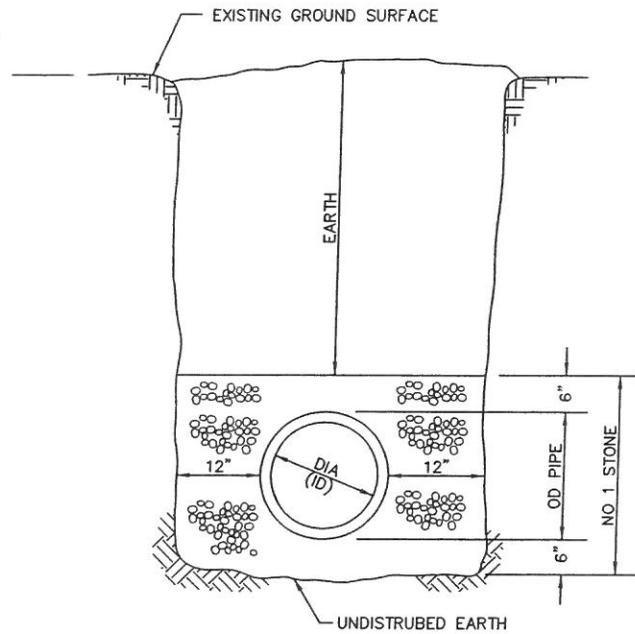


TYPICAL EARTH TRENCH DETAIL
UNPAVED AND UNTRAVELED AREAS

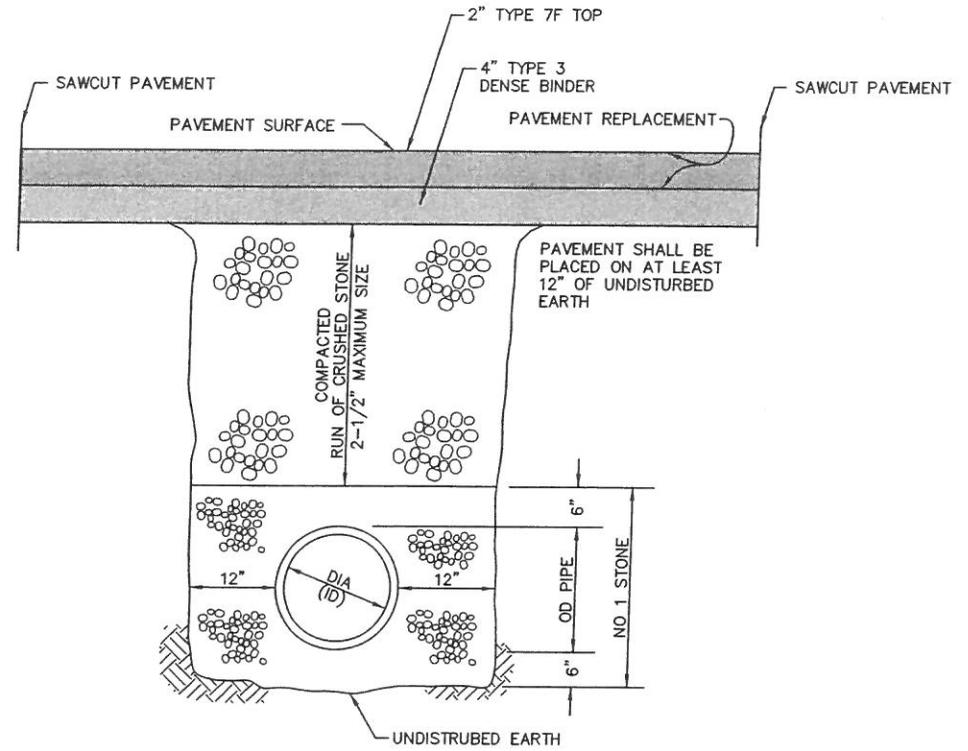

TYPICAL TRENCH DETAIL
TOWN ROAD CROSSING

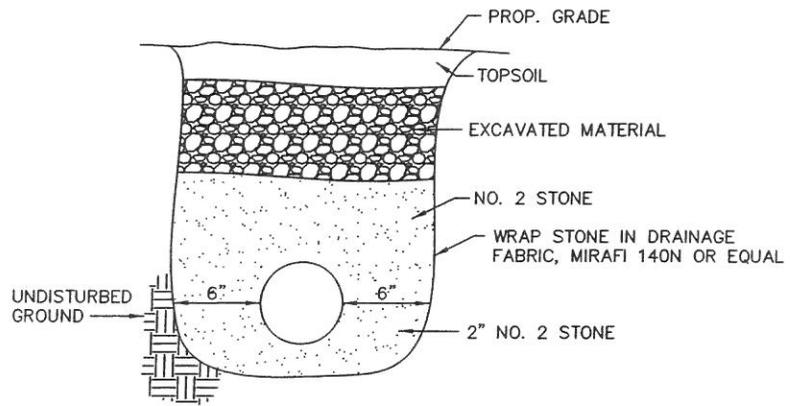


**YARD DRAINAGE
TYPICAL SECTION**

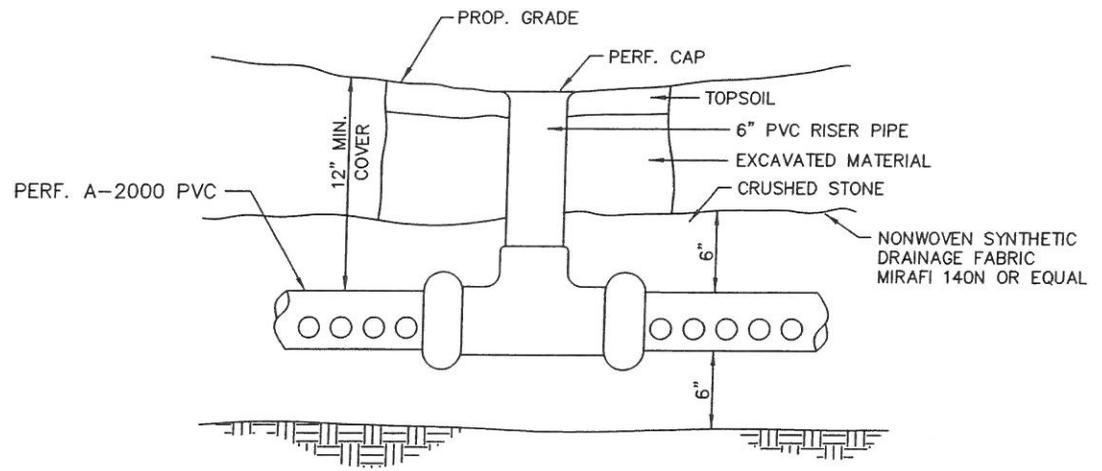


REPLACE WITH CONCRETE CORNER ON HDPE

YARD DRAIN

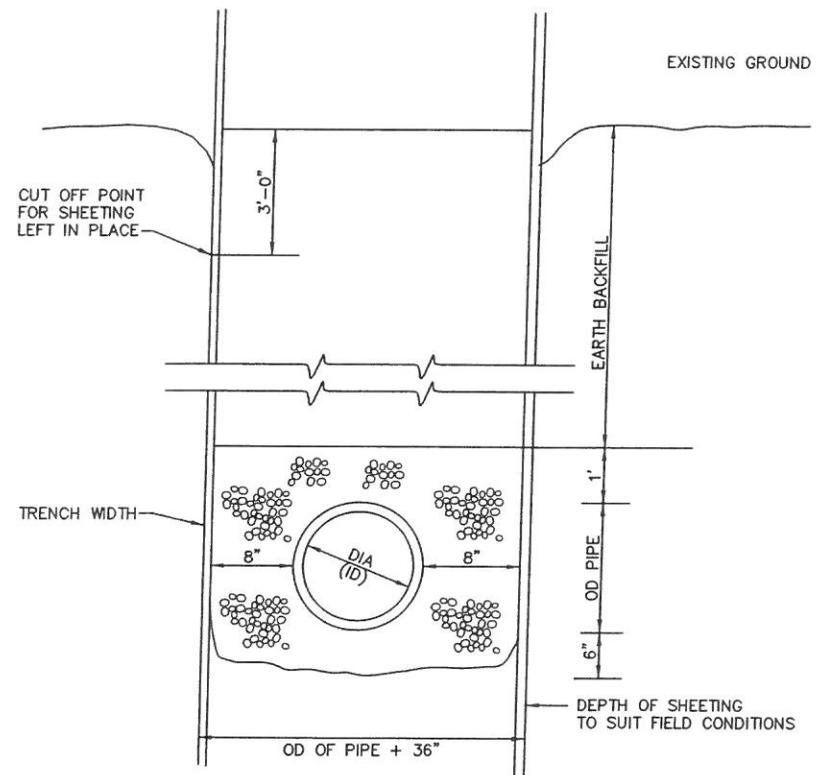

SHEETED TRENCH DETAIL

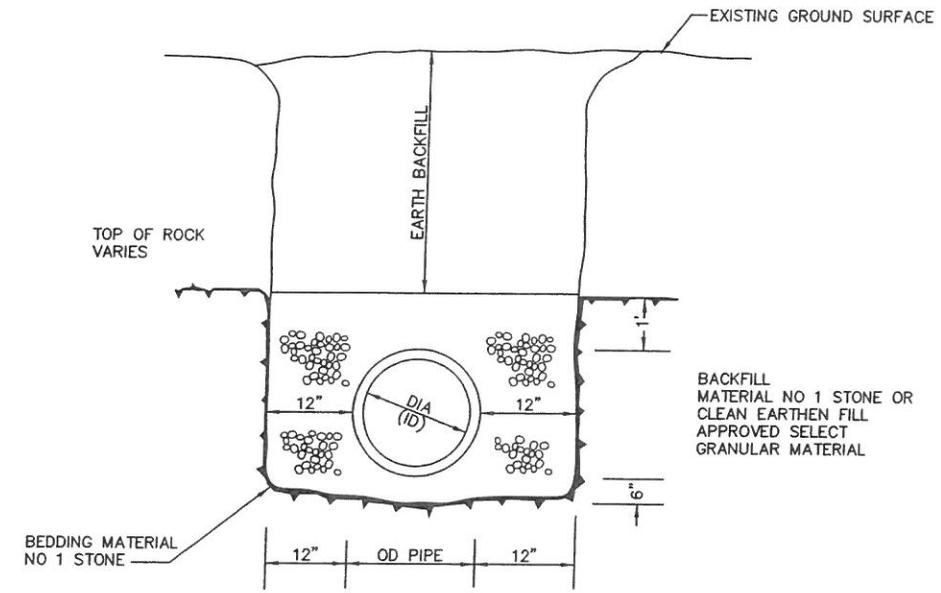

TYPICAL ROCK TRENCH DETAIL